


Durable, versatile and powerful PC suited to a range of business applications



24/7 Reliability



Desktop-grade performance in slim style

- Powered by 11th Generation Intel® Core™, Pentium® and Celeron® processors
- Three-storage design with one M.2 PCIe® Gen4x4 SSD, one M.2 PCIe 3.0 x4 SSD and one 2.5-inch HDD
- Stunning 4K UHD resolution and three-display support

Extreme reliability for business

- Chassis intrusion warns if PB62's chassis has been opened since it was last turned on
- Tested to MIL-STD-810H military standard to ensure it's ready for harsh environments
- Eco-friendly design, recipients EPEAT GLOD and ENERGY STAR
- 24/7 testing reduce maintenance cost and improve cost effectiveness
- Padlock-ring and Kensington lock design for more security


Versatile design

- Classic black and stunning white can blend into any environment
- One configurable port support (options: HDMI 2.0/DP1.2/COM/VGA/2.5G LAN)
- A total of 7 USB ports to connect external devices

Longevity and manageability

- The optional ASUS Corporate Stable Model (CSM) program include a stable roadmap and assured 36-month supply availability, eliminating worries about material-supply gaps or extended availability

Over view:

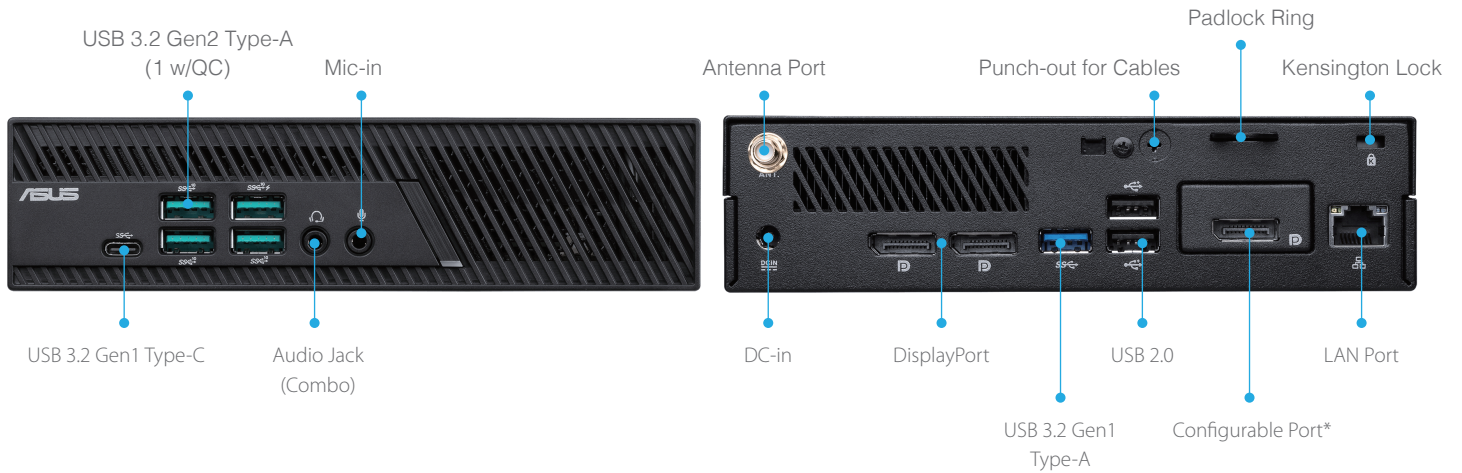

Accessories list:



- Power Cord
- AC Adapter (80cm)
- Quick Start Guide & Warranty Card
- VESA Mount Kit (Optional)
- Keyboard & Mouse (Optional)
Wired / Wireless

Feature table:

Power	
PD input	N
Extended Power Button	N
BIOS	
AC Power loss	Y
HDMI-CEC	N
CrashFree	Y
EZ Flash	Y
BIOS Customization	Y
PXE/WOL	Y
USB Single Port Control	Y

Security	
fTPM 2.0	Y
dTPM 2.0	optional
Kensington lock	Y
Pad-lock	Y
Chassis Intrusion	Y
Reliability	
24/7 Durability Test	Y
Military-grade Durability	Y
Anti-Surge	Y
Fanless	N

Remote	
ASUS Control Center	optional
Watchdog timer	optional
ASUS Cooperate Stable Model	optional
MyLogo	Y
MyASUS / CSM	
Smart Fan Control	N
AI Noise Cancelation	N
Wi-Fi Smart Connect	N

Model		PB62
OS		Windows®11 64bit, Windows®11 Pro 64bit, Linux, or W/O OS (Please check with local rep on validated Linux version)
CPU		Intel® Core™ i7-11700/ i5-11400/ i3-10105/ Pentium Gold G6405/ Celeron G5905 Intel® Core™ i7-11700T/ i5-11500T/ i3-10105T/ Pentium Gold G6405T/ Celeron G5905T
Chipset		Integrated
Graphics		Integrated - Intel® UHD Graphics
Memory		2 x DDR4 SO-DIMM slots for DDR4 2933/3200 MHz, 1 x 4GB - 2 x 32GB (total)
Storage		1 x 6Gb/s SATA connector for 2.5" 1TB HDD/SSD* 1 x M.2 2280 PCIe Gen4 slot for 256GB - 1TB SSD* (NVMe only) 1 x M.2 2280 PCIe Gen3 slot for 256GB - 1TB SSD* (NVMe only) *For higher capacity please refer to QVL (location: official website → Support → CPU / Memory Support)
Wireless Network		Intel® Wi-Fi 6 and Bluetooth 5
LAN		Intel® LAN, 10/100/1000 Mbps Supports Wake on LAN / PXE / Auto Power on / RTC Wake
Interface	Front I/O	3 x USB 3.2 Gen2 (10 Gbps) 1 x USB 3.2 Gen2 (10 Gbps, with BC1.2) 1 x USB 3.2 Gen1 Type-C (5 Gbps) 2 x Audio Jack (Mic in/ Headphone out) <small>*All data transfer speed is according to ASUS testing result, actual performance may vary depending on objective environmental changes.</small>
	Side I/O	N/A
	Rear I/O	1 x USB 3.2 Gen1 (5 Gbps) 2 x USB 2.0 2 x DisplayPort 1.2 1 x Configurable Port (options: HDMI 2.0/DP1.2/COM/VGA/2.5G LAN) 1 x Intel LAN (RJ45) 1 x Padlock ring 1 x Kensington lock 1 x DC-in
TPM		fTPM 2.0 or TPM 2.0 chip (Optional)
BIOS Function		64 Mb Flash ROM, UEFI AMI BIOS, PnP, DMI2.0, WfM2.0, SM BIOS 2.8, ACPI 5.0, Multi-language BIOS, ASUS EZ Flash 3, ASUS CrashFree BIOS 3, My Favorites, Quick Note and ASUS DRAM SPD (Serial Presence Detect) memory information
Software		The following software are included in OS: ASUS Business manager, ASUS Remote Management Tool, ASUS Product registration program, Asus Control Center test, Watchdog timer
Power Supply		20Vdc, 7.5A, 150W (65W CPU) 19Vdc, 6.32A, 120W (35W CPU, i7) 19Vdc, 4.74A, 90W (35W, below i7 CPU)
Physical	Dimension	175 x 175 x 44.2 mm (1.35L)
	Weight	1.14 kg (barebone)
Max Resolution	HDMI	4096 x 2160 @ 60Hz
	DP	3840 x 2160 @ 60Hz
	VGA	1920 x 1200 @ 60Hz
Temperature	Operating	0°C~50°C
	Storage	-40°C~85°C
Humidity		0%~95% Relative Humidity
Acoustic	Idle mode	<25 dBA
	Full loading	<38.2 dBA <small>* Test results will vary slightly depending on the HDD/SSD SKU selected by customer</small>
Certificates		BSMI / CB / CE / FCC / UL / CCC / Energy Star / C-Tick / WiFi / RF / VCCI